



GE APPLIANCES



CONNECT SERIES

VARIABLE SPEED HEAT PUMP SYSTEMS



Connect to Efficiency

The Connect Series is energy efficient, earning a Seasonal Energy Efficiency Ratio (SEER2) of 17. That means it's up to 25% more energy efficient than most residential HVAC, which only meet the federal minimum SEER2 rating.

Connect also has a Heating Seasonal Performance Factor (HSPF2) of 9, surpassing the federal minimum of 7.5.




Connect to Quiet

Comfort is about more than just temperature. Traditional HVAC systems can be loud when starting up and shutting down. Connect features sound-dampening treatments while the smooth inverter technology helps keep sound levels as low as 47 dB — almost as quiet as a library. So, whether you're inside or out, you'll hear exactly what you want to hear.



Connect with Ease

Connect systems are excellent replacements when your legacy HVAC system breaks down because they often connect directly to equipment you already have. Connect units work with select air handlers and with many of the most popular 24-volt smart thermostats on the market.

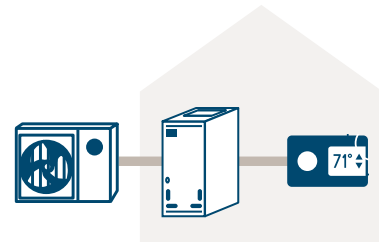

Connect to "Just Right"

The Connect Series features high-efficiency DC inverter technology. That means your system will heat or cool at the right level. Instead of turning "all on" or "all off" like traditional HVAC systems, Connect units have variable speed compressors that help you maintain just right conditions all the time.

Connect units are available in 24,000, 36,000, 48,000 and 60,000 BTU sizes.



Connect to Your Space

These units make efficient use of your space, too! The width of the largest Connect outdoor unit measures only 18 1/8 inches* — almost 14 inches thinner than most traditional equipment!

A slim unit is great for tight areas or reserving space for other important parts of your life.

UNIT WIDTH	
18 1/8"	CONNECT OUTDOOR UNIT
32"	MOST TRADITIONAL EQUIPMENT

10 YEAR LIMITED WARRANTY

Connect with Confidence

When you install an AHRI-rated indoor/outdoor combination (restrictions apply) and register the equipment within 60 days of installation, we'll extend the warranty protection on your Connect Series Heat Pump System's compressor and parts to ten years. That kind of coverage means you can breathe even easier in your quiet, comfortable home.




Connect Series Heat Pump Systems from GE Appliances offer an energy-efficient, cutting-edge alternative to traditional heating and cooling systems and help you connect to the things that matter most.

CONNECT WITH GE APPLIANCES

To learn more about Connect Series Heat Pump Systems, go to <https://www.geappliances.com/ductless> or contact your GE Appliances dealer.

SPECIFICATIONS

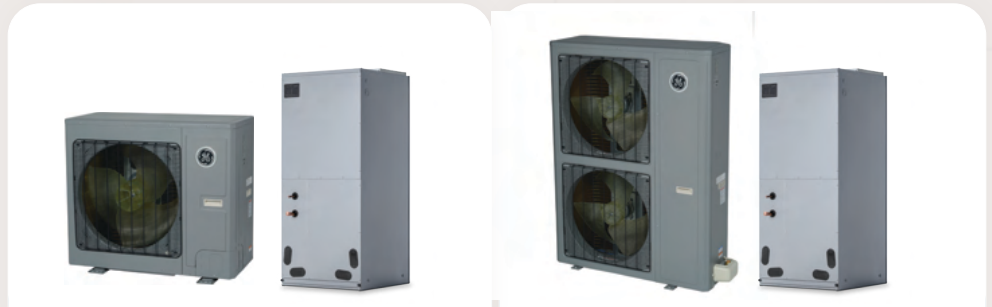

COOLING AND HEATING CAPACITY		24,000 BTU	36,000 BTU	48,000 BTU	60,000 BTU
COOLING	SEER/SEER2	20/17	18/16	18/17	17/15.8
	EER/EER2	12.5/12	10/10	11.5/11	10.5/10
HEATING	HSPF/HSPF2	10.5/9	10/9	10.5/9	10/9
	Electric Backup Heat Kits	5kW/8kW/10kW		10kW/15kW/20kW	
OUTDOOR UNIT	MCA	24		35	
	MOP	35		45	
	Breaker Size A	35		40	
	Outdoor Noise Level - dB	57		58	
	Dimension: H x W x D - in. (mm)	32 1/4 x 37 x 18 1/8 (820 x 940 x 460)		53 3/4 x 42 3/4 x 14 5/8 (1365 x 1085 x 370)	
	Weight Net/Gross - lbs. (kg)	217.2/240.3 (98.5/109)		308.6/337.3 (140/153)	
INDOOR UNIT	Airflow CFM	960	1000	1380	1600
	Indoor Sound Level - dB	47	47	51	51
	Metering Device	TXV	TXV	TXV	TXV
	Breaker Size A	15		15	
	Maximum Static Pressure W.C.	1.0		1.0	
	Dimension: H x W x D - in. (mm)	48 1/4 x 21 1/4 x 21 1/4 (1226 x 540 x 540)		57 x 24 3/4 x 21 1/4 (1448 x 630 x 540)	
	Weight Net/Gross - lbs. (kg)	156.5/169.8 (71/77)		202.8/218.3 (92/99)	
CONTROL	Control Voltage	24VAC		24VAC	
PIPING	Refrigerant Type	R410A		R410A	
	Liquid O.D. - in.	3/8		3/8	
	Suction O.D. - in.	3/4		3/4	
	Piping Connection	BRAZE		BRAZE	
	Factory Charge - lbs. (kg)	9.81 (4.45)		14.33 (6.5)	
	Maximum Line Length - ft. (m)	164 (50)		98 (30)	
	Maximum Height - ft. (m)	50 (15)		50 (15)	

**CONNECT WITH
GE APPLIANCES**

To learn more about Connect Series Heat Pump Systems, go to <https://www.geappliances.com/ductless> or contact your local installer.



GE APPLIANCES



Pub No: 26-GEC2401
Rev: 04-09-24